

ELITE Series™

COLOUR PALETTE



COLOURCOIL® ELITE Series™

- State-of-the-Art INFRA-RED Coating Technology
- Proprietary Infra-Red Ceramic Polyester Paint System
- Anti-Fading & Anti-Staining Paint Formulation
- Unsurpassed Weathering Resistance against Peeling, Flaking and Cracking
- Resistant to Dirt Pickup and Staining
- Exceptional Durability & Integrity unmatched by conventional coating process
- Energy-Efficient Solar-Reflective System
- Environmental Friendly - Mercury and Lead-Free coatings



Pebble Beige
SR : 0.54 SRI : 63.9



Savannah Green
SR : 0.36 SRI : 41.0



Avalon Brown
SR : 0.30 SRI : 30.9



Mocha Orange
SR : 0.50 SRI : 57.1



Rustic Red
SR : 0.36 SRI : 38.3



Marina Blue
SR : 0.30 SRI : 30.4



Mirage Grey
SR : 0.40 SRI : 44.7



Mulberry Brown
SR : 0.35 SRI : 37.7



Anterra Red
SR : 0.29 SRI : 29.0

Colours subject to change according to manufacturer's discretion.

THICKNESS & WIDTH

PROPERTIES

Size Availability	
Thickness (BMT)	0.40mm - 1.00mm
Width	600mm - 1250mm
Coil Internal Diameter	508mm - 610mm
Exit Coil Weight	3 mt - 5 mt


Chemical Properties				
Test	Salt Spray Resistance	Humidity Resistance	Accelerated Weathering	Chemical Resistance
Standard	ASTM B 117-85	ASTM D 2247-87	ASTM D 882-89	ASTM D 1308-87
Condition	5% neutral salt solution spray for 1000 hours	100% humidity at 100° F for 1000 hours	2000 hours in weatherometer	24 hours exposure to 10% HCl and H ₂ SO ₄
Result	No blistering and loss of adhesion	No blistering, cracking, peeling and softening	No chalking, blistering or loss of adhesion	No significant colour change

Physical Properties				
Test	Hardness	Impact Deformation	Bend Adhesion	Cross Hatch Adhesion
Standard	ASTM D 3363-74	ASTM D 2794-84	ASTM D 4145-83	ASTM D 3359-87
Condition	Using Faber-Castell pencil	Direct and reverse impact on Gardner Impact Tester	180° T-Bend test	Tape-off on eleven cross scoring line 1/8" apart
Result	F minimum	10 Joule minimum	4T minimum	No paint removal

- **Substrates**
- Aluminum Zinc Coated Steel

*Warranty terms & conditions apply

COATING SPECIFICATION

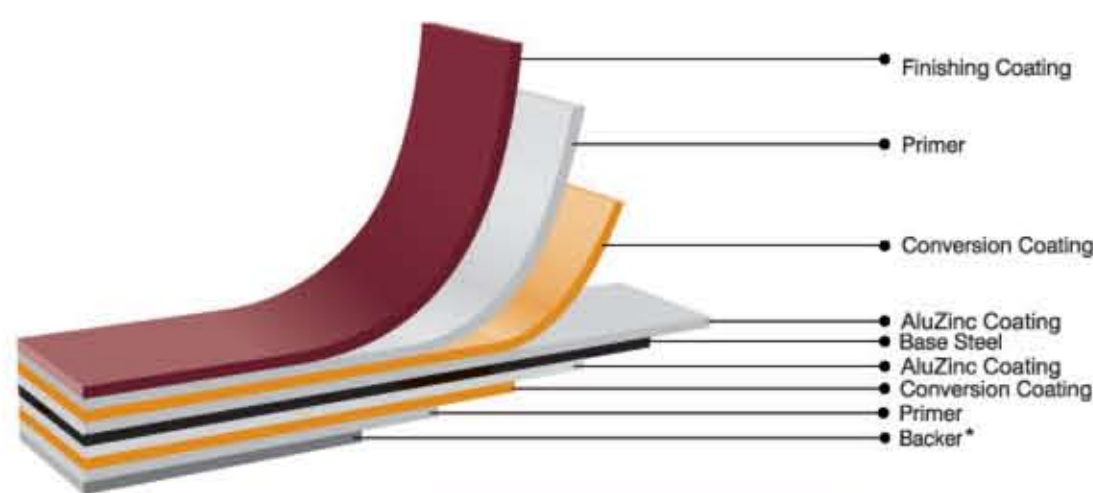

Top		Back		Gloss
Primer	Finish	Primer	Backer	Level
5	18 - 20	5	5	25%

Unit : Microns μm

What is Solar Reflectivity (SR)?

Solar reflectivity or reflectance is the ability of a material to reflect solar energy from its surface back into the atmosphere. The SR value is a number from 0 to 1.0. A value of 0 indicates that the material absorbs all solar energy and a value of 1.0 indicates total reflectance. Energy Star requires an SR value of 0.25 or higher for steep slope (above 2:12) roofing and an SR value of 0.65 or higher for low slope (2:12 or less) roofing. For more information, please go to www.energystar.gov.

What is Solar Reflectance Index (SRI)?

The SRI is used to determine compliance with GBI requirements and is calculated according to ASTM E 1980 using values for reflectance and emissivity. Thermal emissivity (TE) is a material's ability to release absorbed energy. To meet GBI requirements, a roofing material must have an SRI of 29 or higher for steep slope (above 2:12) roofing and an SRI value of 78 or higher for low slope (2:12 or less) roofing. For more information, please go to www.greenbuildingindex.com.

* Authentic Elite Series are brand marked on the backing coat.

"Superb Durability"



Colourcoil Industries Sdn. Bhd. (342774 - M)
Off KM 25, Jalan Tuaran, Telipok, Kota Kinabalu, P. O. Box 21918, 88777 Luyang, Kota Kinabalu, Sabah, Malaysia.
Tel : 088-496222 Fax : 088-499918 E-mail : info@colourcoil.com Website : www.colourcoil.com
Kuala Lumpur Branch: 1005, Block A, Pusat Dagangan Damansara 1, No. 9, Jalan 16/11, Off Jalan Damansara, 46350 Petaling Jaya, Selangor, Malaysia. Tel: 03-79581008 Fax: 03-79561009

